




## Specs

ITEM	SSO-4.44	SSO-6	SSO-8	SSO-10	SFO-10U	SFO-16U
LED	SMD 3 IN 1	SMD 3 IN 1	SMD 3 IN 1	SMD 3 IN 1	DIP 347	DIP 347
Pixel Pitch (mm)	4.44	6.67	8	10	10	16.67
Module Resolution	72x72	48x48	40x40	32x32	20x40	12x24
Module Size (WxH mm)	320x320	320x320	320x320	320x320	200x400	200x400
Pixel Density (pixels/ □)	50,652	22,477	15,625	10,000	10,000	3,600
Cabinet Size (WxH mm)	1280x1280	1280x1280	1280x1280	1280x1280	1200x1200	1200x1200
Cabinet Material	Sheet Aluminum	Sheet Aluminum	Sheet Aluminum	Sheet Aluminum	Sheet Aluminum	Sheet Aluminum
Scan Ratio	1/6	1/6	1/4	1/2	1/4	static
Weight □kg/ □)	29	29	29	29	30	30
Ingress Protection	IP67/IP65	IP67/IP65	IP67/IP65	IP67/IP65	IP67/IP65	IP67/IP65
Maintenance	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear	Front/Rear
Refresh Rate (Hz)	≥1920-3840	≥1920-3840	≤3840	≤3840	≤3840	≤3840
Brightness (nits)	5,500-9,000	6,000-9,000	6,000-9,500	6,500-10,000	10,000	10,000
View Angle (H./V.)	140° / 120°	140° / 120°	140° / 120°	140° / 120°	120° / 120°	120° / 120°
Contrast Ratio	6,000:1	6,000:1	8,000:1	8,000:1	8,000:1	8,000:1
Max. Power Consumption	600-800 W/□	600-800 W/□	600-800 W/□	600-800 W/□	360W/□	360W/□
Avg. Power Consumption	266 W/□	266 W/□	266 W/□	266 W/□	120 W/□	120 W/□


## One of the Panel Sizes

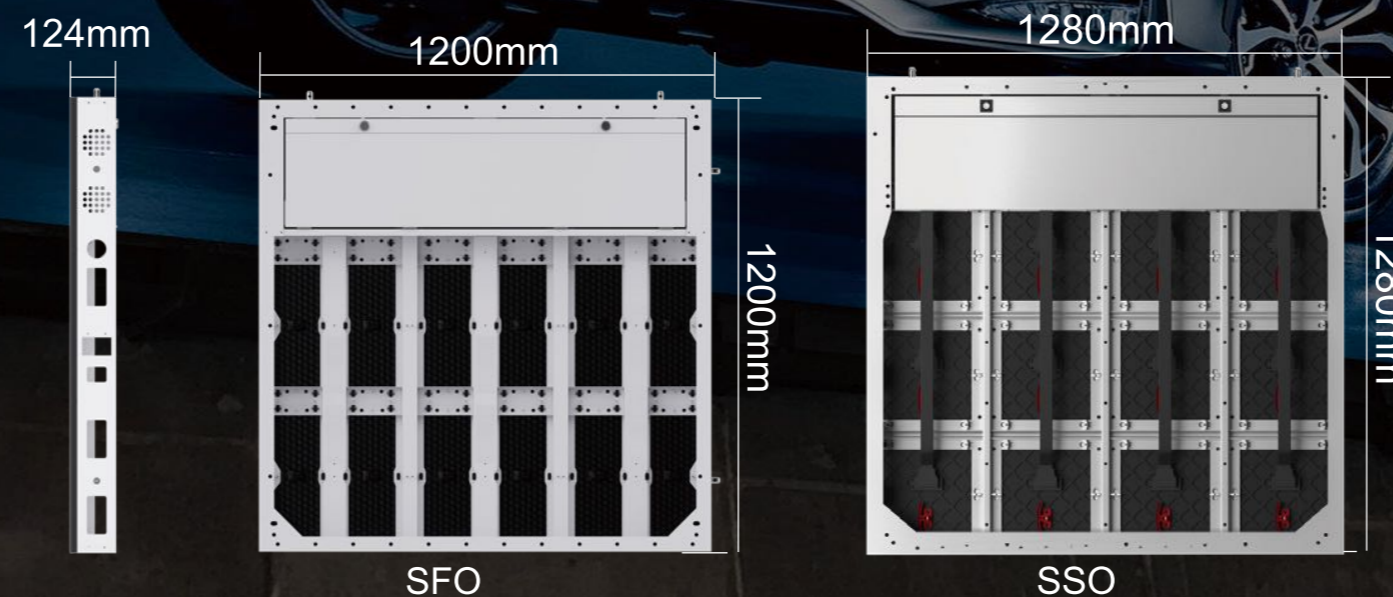

## Front and Rear Accessible

### Front Access

1/4 turn on the module latches from front, the module can be pulled out.

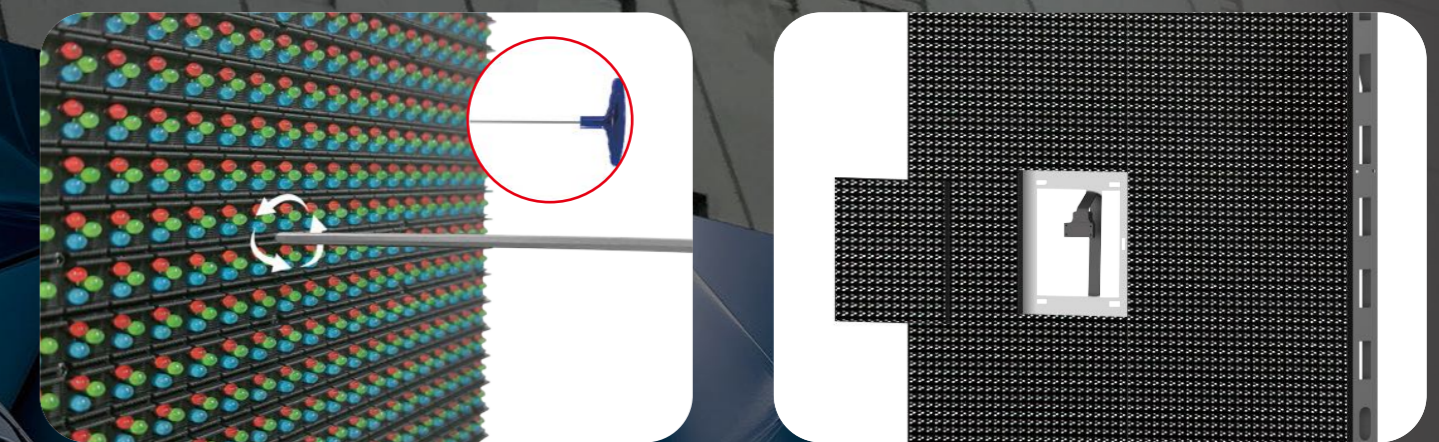

### Rear Access

1/4 turn on the module latches from rear, the module can be taken out.



**SSO & SFO**

Outdoor Media Panel

